



# HYDRAULIC NUT SPLITTER


## Pumps for Nut Splitter:

### 1. Manual Pump

#### Specifications:

Model No.: TMP-3

- Single Stage Pump
- Pressure: 700Bar
- Handle Effort: 40kg
- Oil Tank Capacity: 2.2 Litres
- Flow Rate: 2.8cc

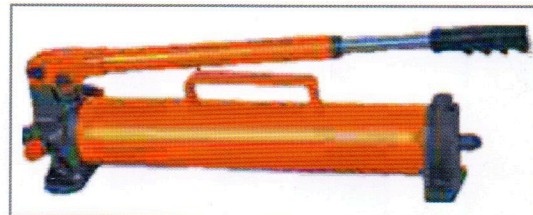


### 2. Foot Operated Hydraulic Pump

#### Specifications:

Model No.: TPF - 01 NS



- 3/3 Control Pedal Valve
- Working Pressure: 700Bar
- 1/4" BSP air inlet
- Oil Tank Capacity: 5 litres, Usable Oil Volume- 4 litres
- Single acting cylinder
- Flow Rate: 0.8 LPM to 0.16 LPM)
- 3/8" NPT outlet•Weight: 13.9kg

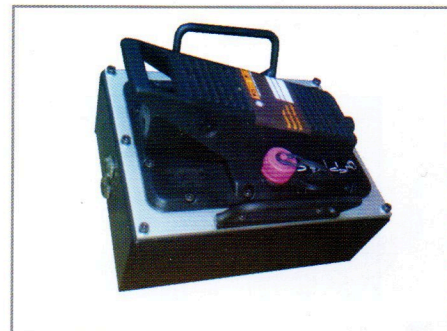

# FLANGE SPREADER

Type	Standard Hydraulic Flange Spreader	
Model No.	TFS-10M	TFS-10H
Jaws Closed	2.3mm / 0.09"	2.3mm / 0.09"
Jaws Open	76.2mm / 3"	76.2mm / 3"
Width of Jaws	114mm / 4.5"	114mm / 4.5"
Width of Body	114mm / 4.5"	114mm / 4.5"
Jaw Penetration	38.1mm / 1.5"	38.1mm / 1.5"
Rated Force	4.5ton / 10,000lbs	4.5ton / 10,000lbs
Weight	6.1kg / 13lbs	5.4kg / 12lbs

Type	Wedge type Flange Spreader	
Model No.	TFS-8M	TFS-14H
Jaws Closed	6mm / 0.24"	6mm / 0.24"
Jaws Open	80mm / 3.16"	80mm / 3.16"
Rated Force	8ton / 17,000lbs	14ton / 30,000lbs
Weight	7kg / 16lbs	8kg / 18lbs

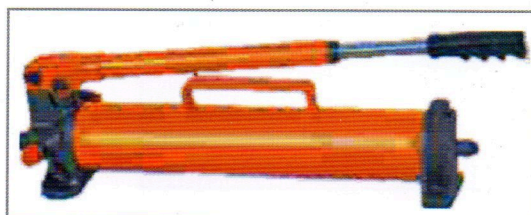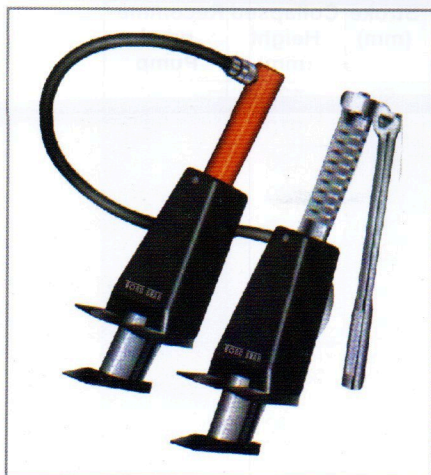

Please observe safety advices